

FIG. 11B(1)




FIG. 11B



FIG.11B(2)

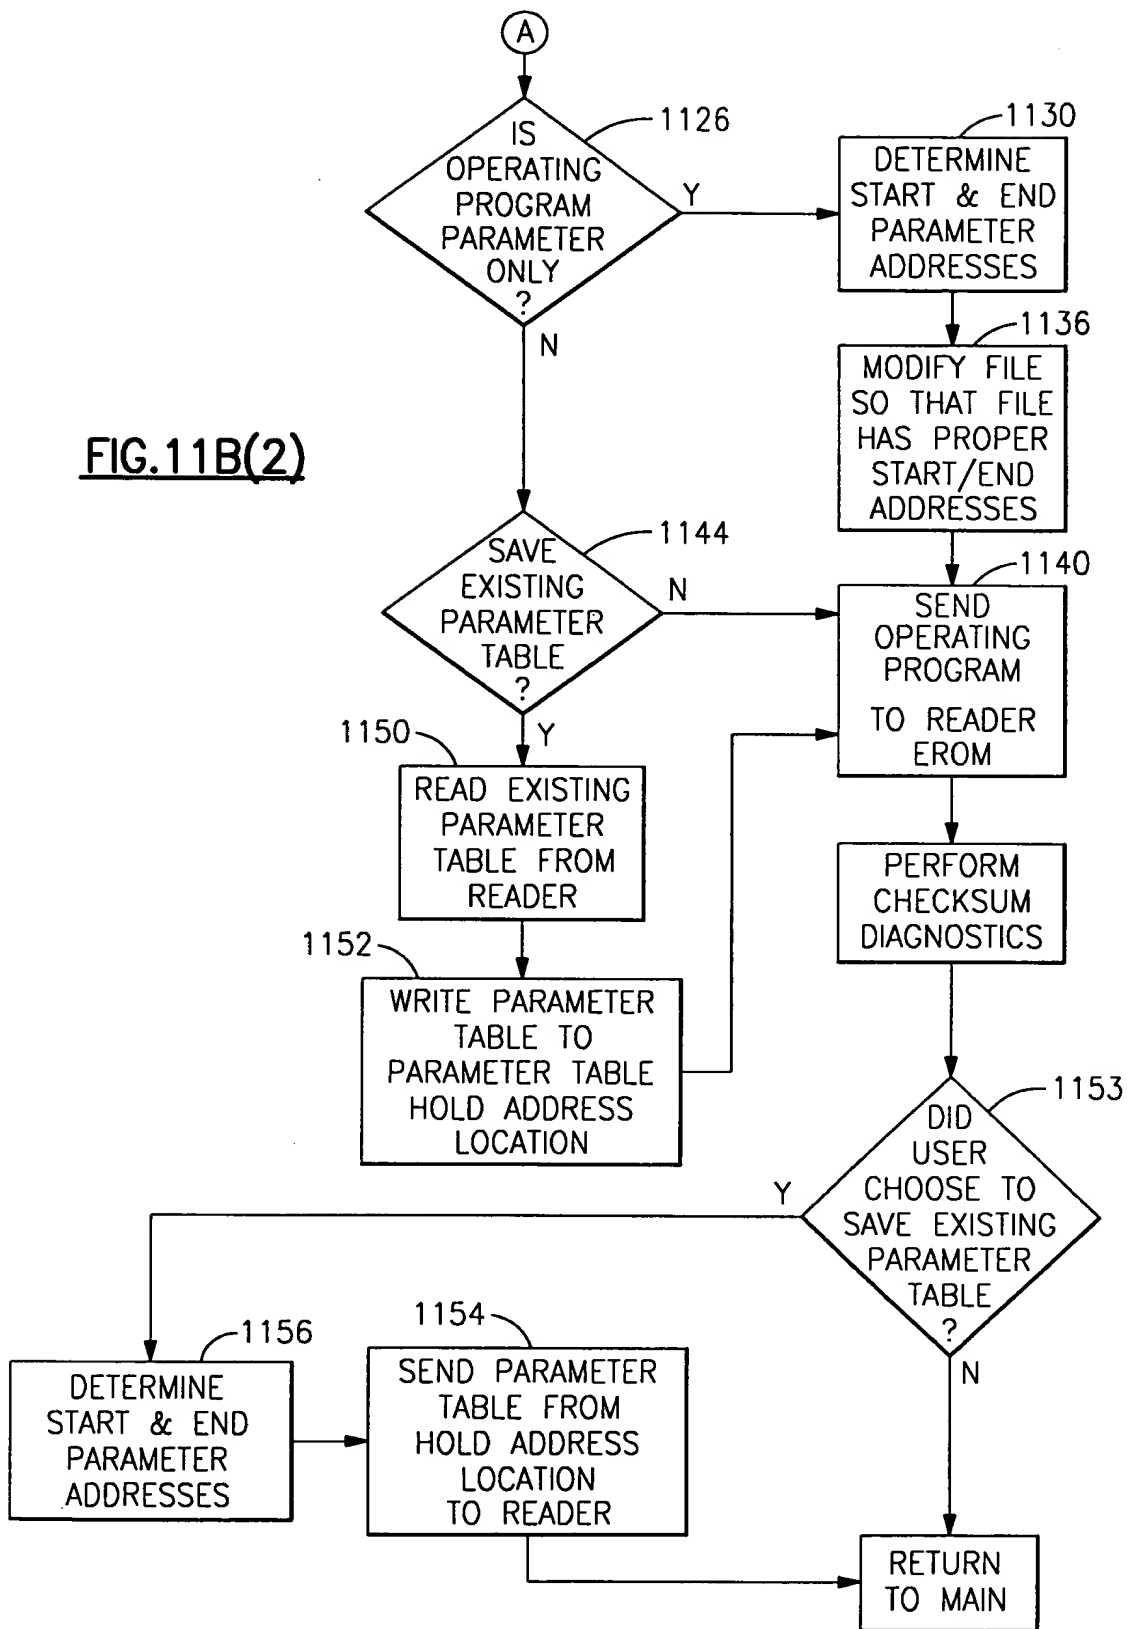


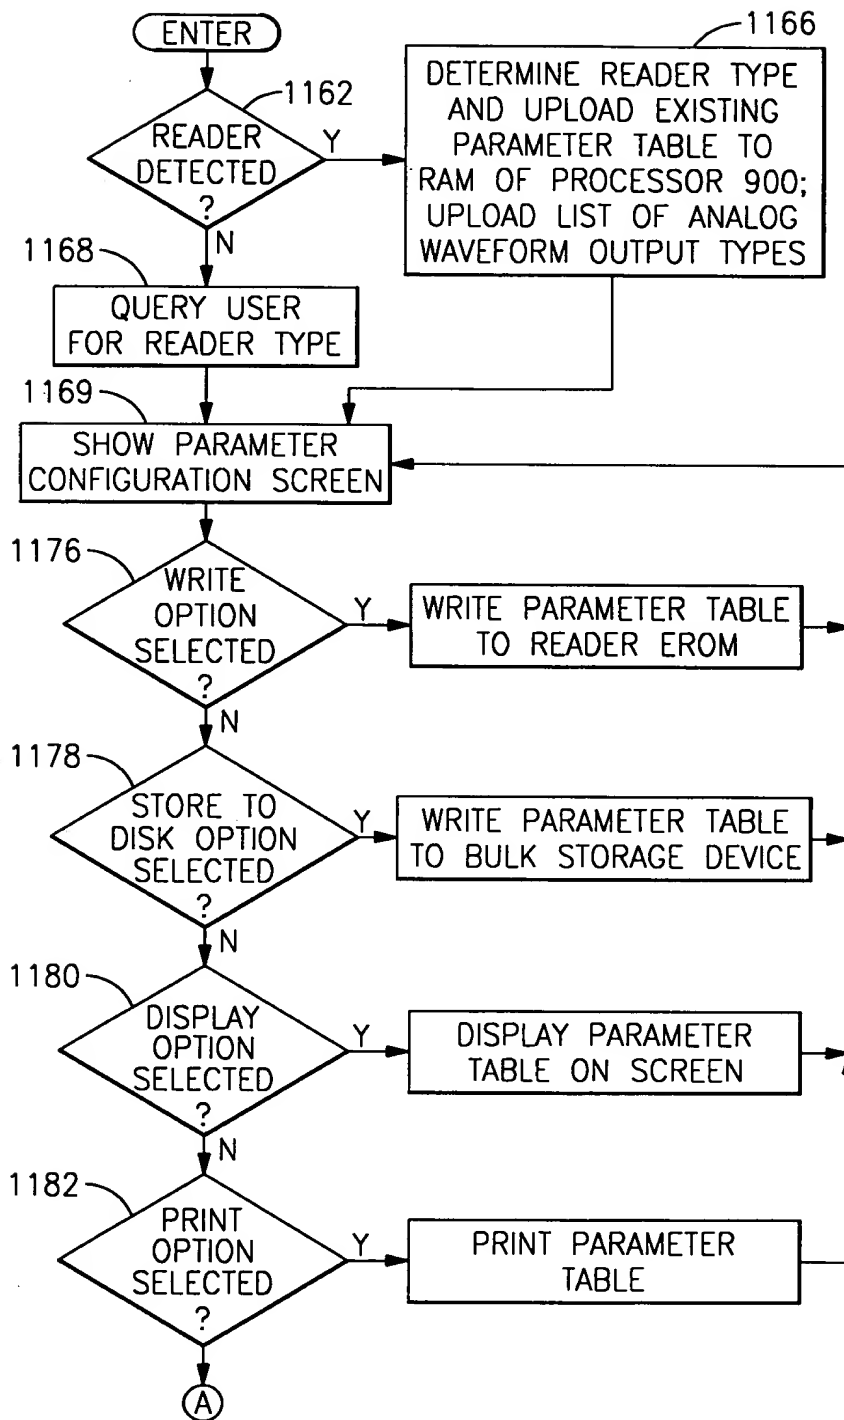


FIG.
11D(1)

FIG.
11D(2)

FIG.11D

FIG.11D(1)



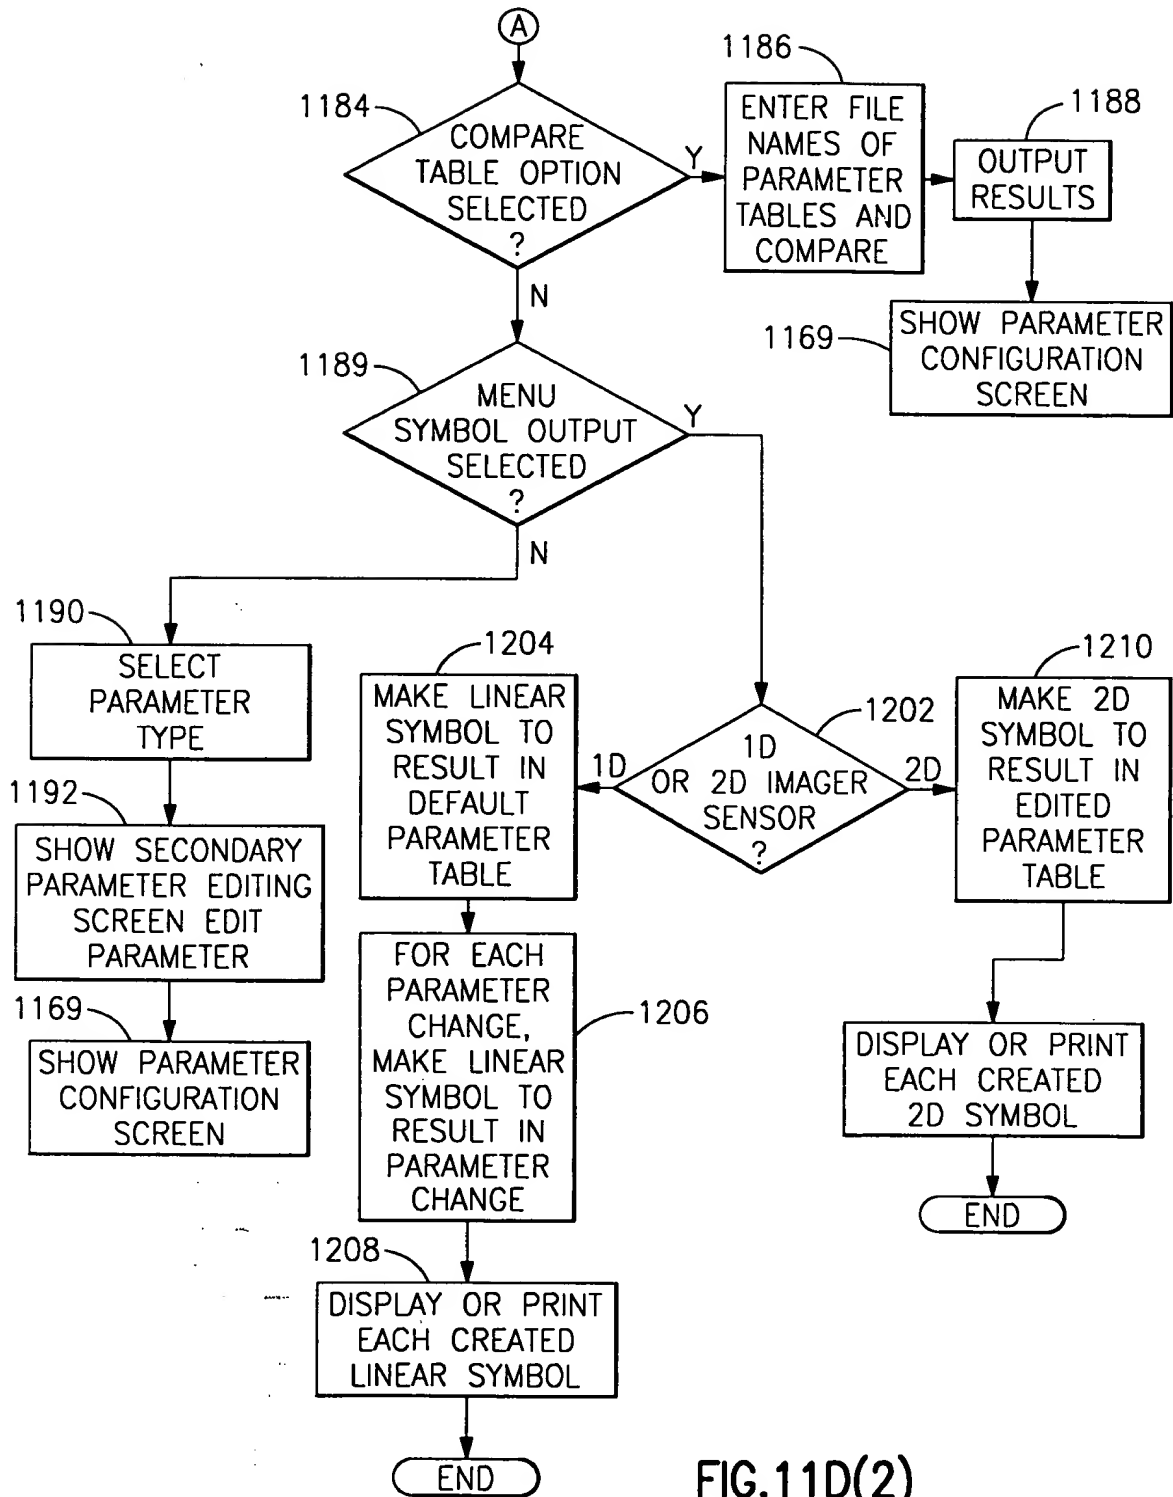



FIG. 11D(2)



| DEVICE CONFIGURATION | |
|--|--|
| PRODUCT: ST3400-x2 | FIRMWARE ID: WA23720027 |
| CONFIGURATION: | DESCRIPTION: |
| PREFIX/SUFFIX | SETUP CHARACTERS TO TRANSMIT BEFORE AND/OR AFTER EACH BARCODE SYMBOL SCANNED |
| OUTPUT SETTINGS | SETUP VARIOUS OUTPUT PARAMETERS |
| SYMBOLGY SETUP | SETUP DECODING CHARACTERISTICS FOR EACH BARCODE SYMBOLGY |
| TERMINAL INTERFACE | SELECT THE TERMINAL INTERFACE THE DEVICE WILL CONNECT TO |
| DATA FORMATTING | CUSTOMIZE THE FORMAT OF THE OUTPUT OF THE BARCODE MESSAGE |
| SERIAL SETTINGS | SETUP THE DEVICE'S SERIAL COMMUNICATION PARAMETERS |
| MISC. SETTINGS | SETUP VARIOUS PRIMARY AND SECONDARY INTERFACE OPTIONS |
| <div>READ FROM DEVICE</div> <div>WRITE TO DEVICE</div> <div>LOAD FROM DISK</div> <div>SAVE TO DISK</div> <div>DEFAULT ALL</div> <div>HELP</div> <div>CLOSE</div> | |

1174

FIG.11E

